

SPLIT-PAK A2L™ REFRIGERATION SYSTEMS

GET FUTURE-READY INDOOR AND OUTDOOR SYSTEMS TODAY



Compliance-ready Split-Pak A2L systems, featuring **R-454A and R-454C** refrigerants, are now available. Systems include **indoor and outdoor** condensing units and evaporator coils designed and built in-house to match your specifications. RSG also offers full technical and consultant support to assist with any questions.

INCLUDING THESE COMPONENTS FOR A WORRY-FREE INSTALLATION:


Safety shut-off valves and safety check valves shipped loose for field installation



Pre-installed leak sensors for rapid detection



Precise mitigation control through RSG's LogiTemp® controller system

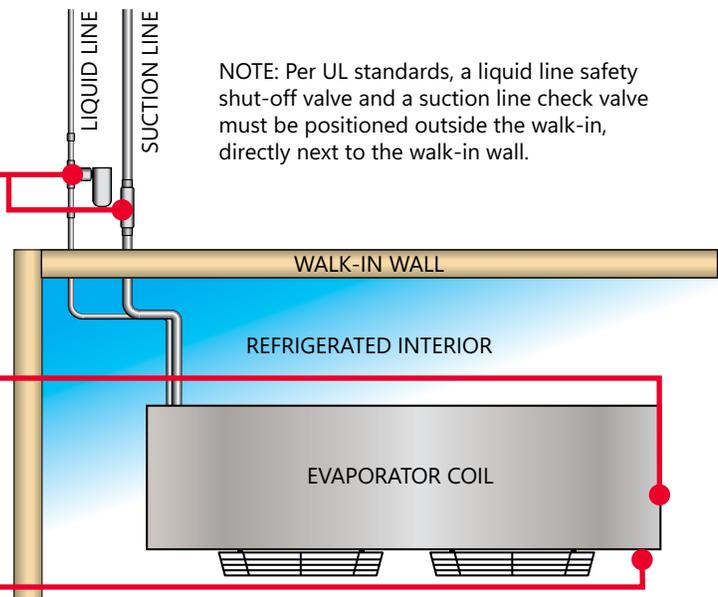

NOTE: Per UL standards, a liquid line safety shut-off valve and a suction line check valve must be positioned outside the walk-in, directly next to the walk-in wall.