



MBFGM72HB

MBFGM-HB SERIES

Bottom Mounted
 Swing Glass Door
 Freezer Merchandisers
 With Lighted Sign

MODELS

- MBFGM23HB
- MBFGM48HB
- MBFGM72HB

FEATURES

CONSTRUCTION

- Black vinyl coated exterior with white interior and stainless steel floor
- Foamed-in-place with polyurethane insulation
- Top LED backlit panel
- Two LED light strips per door for maximum product illumination
- Four heavy duty shelves, adjustable in 1/2" increments, per door and capable of supporting 125 lbs.
- Product label strips on shelves
- Heavy duty factory-installed casters
- Electronic adjustable temperature control with digital display

DOORS

- Self-closing swing doors with energy efficient triple pane glass
- Standard lock for each door
- Magnetic gaskets

REFRIGERATION

- Self-contained bottom mounted, air cooled refrigeration system with coated evaporator coil
- Automatic defrost
- Condensate is collected and automatically evaporated from an energy efficient vaporizer
- Refrigerant flow is controlled by a capillary tube

- R290 refrigerant
- Temperature range: -10°F to +10°F

WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

BID SPECIFICATIONS

Item no. MBFGM_____HB
 Provide_____() bottom mounted swing glass door merchandiser freezer(s) with lighted sign Master-Bilt® model MBFGM_____HB.

Merchandiser to be constructed of black vinyl coated exterior with white interior and stainless steel floor. Other standard features will include a top LED backlit

panel, two LED light strips per door and factory-installed casters.


Merchandiser will also feature four heavy-duty shelves, adjustable in 1/2" increments, per door and capable of supporting 125 lbs. each.

Locking swing doors will be self-closing with triple pane glass and magnetic gaskets.


Refrigeration system will use R290 refrigerant in all models. The temperature range will be -10° to 10°F .

Merchandiser to have standard limited three year parts and labor with additional two year coverage on compressor part.

Merchandiser to be ETL listed in the U.S. and Canada and ETL Sanitation listed.

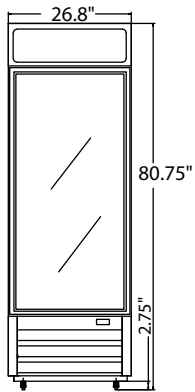


FRONT



TOP


MBFGM23HB

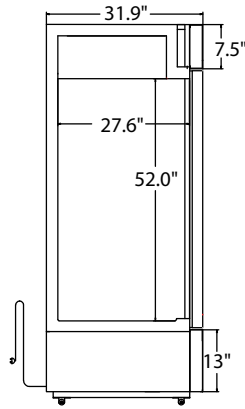

SIDE
ALL MODELS




FRONT




TOP

MBFGM48HB




FRONT



TOP

MBFGM72HB

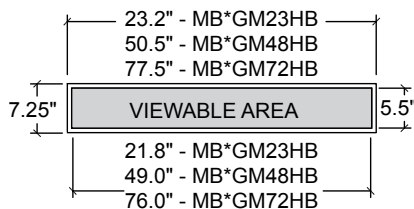

GRAPHIC PANEL DIMENSIONS

SPECIFICATIONS

Models	MBFGM23HB	MBFGM48HB	MBFGM72HB
Crated Weight (lbs) (kg)	342 (155)	564 (256)	820 (372)
Crated Height (in) (mm)	84.6 (2149)	84.6 (2149)	84.6 (2149)
Crated Width (in) (mm)	28.3 (719)	55.5 (1410)	82.6 (2098)
Crated Depth (in) (mm)	34.8 (884)	34.8 (884)	34.8 (884)
Interior Height (in) (mm)	52.0 (1321)	52.0 (1321)	52.0 (1321)
Interior Width (in) (mm)	22.2 (564)	49.4 (1255)	76.4 (1941)
Interior Depth (in) (mm)	27.6 (701)	27.6 (701)	27.6 (701)
Overall Height (in) (mm)	80.75 (2051)	80.75 (2051)	80.75 (2051)
Overall Width (in) (mm)	27 (686)	54 (1372)	81 (2057)
Overall Depth (in) (mm)	32 (813)	32 (813)	32 (813)
Gross Cubage (CuFt) (L)	23.0 (651)	49.0 (1388)	72.0 (2039)
Number of Shelves	4	8	12
Shelf Area (SqFt) (Sqm)	18.9 (1.8)	43.4 (4.0)	67.9 (6.3)
Number of Casters	4	4	6
Condensing Unit Size (HP)	1/2	1	*
Refrigerant	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115-230/60/1
Cord and Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	L14-20P
Total Amp Draw	8.0	9.0	9.0

*Consult factory.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.