



MBMC SERIES Dual Access Milk Coolers

MODELS

- MBMC08D*
- MBMC12D*
- MBMC16D*

*Add suffix "W" for white finish, "S" for stainless steel

FEATURES

CONSTRUCTION

- White enamel painted smooth steel exterior with stainless steel interior
- Dual access to allow serving of two feeding lines
- Corner bumpers
- Four 4" factory-installed easy-roll swivel casters (two locking)
- Epoxy-coated heavy-duty floor racks
- NSF-listed digital thermometer
- Foamed-in-place eco-friendly polyurethane insulation
- Doors and cabinet top foamed-in-place with polyurethane insulation

DOORS

- Self-service doors with stainless steel exterior and interior

- Fold-back, insulated doors equipped with locks, gaskets and stainless steel hinges
- Designed to be easily opened by children for self-service
- Hold-open feature secures door during serving

REFRIGERATION

- Self-contained bottom mounted system, air-cooled condensing unit
- Powerful, large-capacity system allows cooler to quickly pull product down to storage temperature and maintain it
- Cold wall evaporator with no moving parts which allows more storage space

- Refrigerant: R290
- Operating temperature: 34° to 40°F (1° to 4°C)

WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

OPTIONS

- Stainless steel exterior (add suffix "S")

BID SPECIFICATIONS

Item no. MBMC _____
 Provide _____ () dual access milk cooler(s), Master-Bilt[®] model no. MBMC _____.

Milk cooler will be a dual access type and will be constructed of white painted steel exterior with stainless steel interior. Doors to be stainless steel on the exterior and interior. Doors will also be locking


and fold-back type. In addition, door will be equipped with gaskets, stainless steel hinges and a hold-open feature to secure during serving.

Cooler to be provided with four swivel casters (two locking) and an NSF-listed digital thermometer. Cabinet insulation will consist of foamed-in-place polyurethane.


The self-contained refrigeration system will feature a cold wall evaporator and R290 refrigerant. The operating temperature will 34° to 40°F (1° to 4°C).

Cooler to have standard limited three year parts and labor with an additional two year coverage on compressor part.

Cooler to be ETL Safety and Sanitation listed.

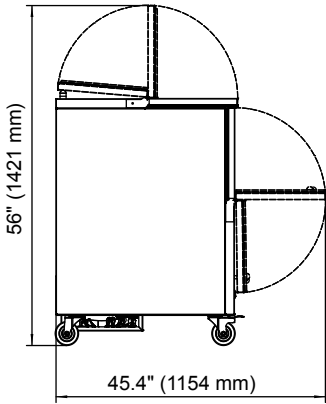


SIDE VIEW (ALL MODELS)




FRONT

MBMC08D




TOP

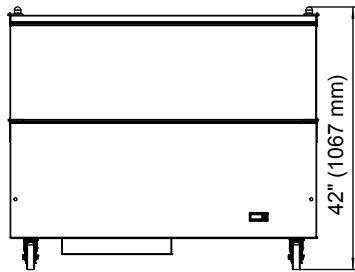


FRONT

MBMC12D

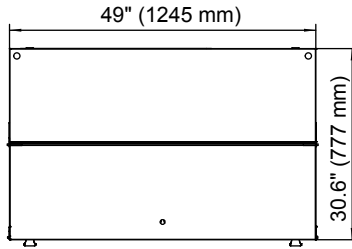


TOP

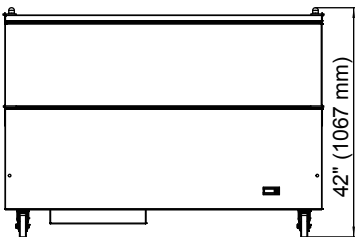

FRONT

MBMC16D

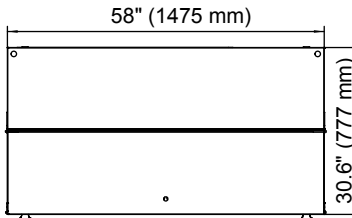

TOP

SPECIFICATIONS			
Model*	MBMC08D*	MBMC12D*	MBMC16D*
Crated Weight (lbs.) (kg)	165 (75)	212 (96)	243 (110)
Crated Height (in) (mm)	48.6 (1234)	48.6 (1234)	48.6 (1234)
Crated Width (in) (mm)	35.8 (909)	50.8 (1290)	59.8 (1519)
Crated Depth (in) (mm)	32.3 (820)	32.3 (820)	32.3 (820)
Interior Height (in) (mm)	25.2 (640)	25.2 (640)	25.2 (640)
Interior Width (in) (mm)	30.9 (785)	45.9 (1166)	54.9 (1394)
Interior Depth (in) (mm)	26.5 (673)	26.5 (673)	26.5 (673)
Overall Height (in) (mm)	42 (1067)	42 (1067)	42 (1067)
Overall Width (in) (mm)	34 (865)	49 (1245)	58 (1475)
Overall Depth (in) (mm)	30.6 (777)	30.6 (777)	30.6 (777)
Gross Cubage (CuFt) (L)	13.2 (374)	19.6 (555)	23.5 (665)
Number of Floor Racks	2	2	2
Number of Casters	4	4	4
Condensing Unit Size (HP)	1/4	1/4	1/4
Refrigerant	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes
Nema Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	3.0	3.0	3.0

* Add suffix "W" for white exterior, "S" for stainless steel.

Specifications subject to change without notice.

MODEL	CASES WITH CARTONS			
	13" x 13" x 11"H		19" x 13" x 11"H	
	CASES	CARTONS	CASES	CARTONS
MBMC08D	8	352	4	288
MBMC12D	12	528	8	576
MBMC16D	16	704	10	720

MODEL	LOOSE CARTON (WITHOUT CASES)			
	FLAT TOP		PEAKED TOP (GABLE)	
	1/2 PINT	1 PINT	1/2 PINT	1 PINT
MBMC08D	864	432	680	430
MBMC12D	1368	684	1020	645
MBMC16D	1800	900	1360	860

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.