

## FUSION™ MBBB-G SERIES

### Glass Door Back Bar Refrigerators

#### MODELS

- ☐ MBBB59-G
- ☐ MBBB69-G
- ☐ MBBB79-G
- ☐ MBBB95-G



MBBB69-G



Approved to NSF standard for packaged food products.

#### FEATURES

##### CONSTRUCTION

- Stainless steel top
- Black exterior finish on front, door, sides and back
- Galvanized steel interior with stainless steel floor
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1-1/2"
- Two adjustable shelves per section
- Interior LED lighting
- Adjustable temperature control
- Internal height capacity allows stacking of three longneck beers

##### DOORS

- Standard door locks on each door
- Magnetic door gaskets, removable without tools
- Door openings have plastic breaker strips to reduce condensation

##### REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on left side
- Evaporator coils are epoxy-coated to resist corrosion
- Condensate evaporator
- Slide-out condensing unit for easy cleaning and service
- Refrigerant: R290
- Temperature range: 34° to 38°F (1° to 3°C)

##### WARRANTY






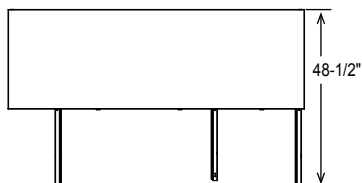

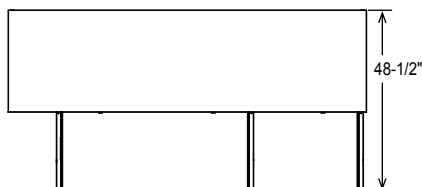
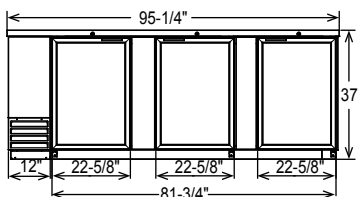
- Standard limited three year parts and labor
- Additional two year coverage on compressor part

#### OPTIONS

- ☐ Shelves with bottle dividers
- ☐ 4" plate casters
- ☐ Floor protector kits
- ☐ Solid doors

**TECHNICAL SPECIFICATIONS**

Models	MBBB59-G	MBBB69-G	MBBB79-G	MBBB95-G
Crated Weight (lbs) (kg)	256 (116)	287 (130)	331 (150)	370 (168)
Crated Height (in) (mm)	44 (1118)	44 (1118)	44 (1118)	44 (1118)
Crated Width (in) (mm)	61 (1549)	71 (1803)	83 (2108)	98 (2489)
Crated Depth (in) (mm)	30 (762)	30 (762)	30 (762)	30 (762)
Interior Height (in) (mm)	32 (813)	32 (813)	32 (813)	32 (813)
Interior Width (in) (mm)	54-3/4 (1391)	64-3/4 (1645)	76-1/2 (1943)	91 (2311)
Interior Depth (in) (mm)	21-1/2 (546)	21-1/2 (546)	21-1/2 (546)	21-1/2 (546)
Overall Height (in) (mm)	37 (940)	37 (940)	37 (940)	37 (940)
Overall Width (in) (mm)	59 (1499)	69-1/8 (1756)	80-3/4 (2051)	95-1/4 (2419)
Overall Depth (in) (mm)	29-5/8 (752)	29-5/8 (752)	29-5/8 (752)	29-5/8 (752)
Gross Cubage (CuFt) (L)	19.4 (549)	23.4 (663)	27.9 (790)	33.6 (951)
Number of Shelves	4	4	6	6
Shelf Area (SqFt) (Sqm)	14.1 (1.31)	16.9 (1.57)	19.8 (1.84)	22.6 (2.1)
Condensing Unit Size	3/8 HP	3/8 HP	3/8 HP	3/8 HP
Refrigerant	R290	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	3.5	3.5	3.5	3.5
12 oz. Can Capacity	1084	1299	1566	1875
12 oz. Bottle Capacity	498	594	714	858


**MBBB59-G PLAN VIEW**

**MBBB59-G ELEVATION VIEW**

**ALL MODELS  
SIDE VIEW**

**MBBB69-G PLAN VIEW**

**MBBB69-G ELEVATION VIEW**

**MBBB79-G PLAN VIEW**

**MBBB79-G ELEVATION VIEW**

**MBBB95-G PLAN VIEW**

**MBBB95-G ELEVATION VIEW**

**LISTINGS**

Intertek

Approved to NSF standard for packaged food products.

**HOOKUP**

All models via plug in, 9 foot long flexible three wire 14 gauge cord with molded plug.



NEMA 5-15P

**BID SPECIFICATIONS**

Item no. MBBB\_\_\_\_-G.

Provide \_\_\_\_ Glass Door Back Bar Refrigerator, Master-Bilt model no. MBBB\_\_\_\_-G.

Back bar refrigerator will feature stainless steel top with black finish on front, door, sides and back. Interior will be galvanized steel with stainless steel floors. Door openings will have plastic breaker strips to

reduce condensation. Adjustable epoxy-coated shelves and interior LED lighting will also be standard.

The refrigeration system will be self-contained and use R290 refrigerant. The temperature range will be 34° to 38°F (1° to 3°C).

System will be equipped with coated evaporator coils and a condensate evaporator. Condensing

unit will be slide-out type for easy cleaning and service.

Refrigerator to have standard limited three year parts and labor warranty with additional two year coverage on compressor part.

Refrigerator to be UL, C-UL and ETL Sanitation listed as well as approved to NSF standard for packaged food products.

**NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.  
All specifications within this publication subject to change without notice.**