

FUSION™ MBRGM-SB SERIES

Bottom Mounted Slide Glass Door
 Merchandiser With Lighted Sign

MODEL

☐ MBRGM48SB



MBRGM48SB



FEATURES

CONSTRUCTION

- Black vinyl coated exterior with white interior and stainless steel floor
- Foamed-in-place with polyurethane insulation
- Top LED backlit panel
- Two LED light strips for maximum product illumination
- Four heavy duty shelves, adjustable in 1/2" increments, per door and capable of supporting 125 lbs.
- Product label strips on shelves
- Heavy duty factory-installed casters
- Electronic adjustable temperature control with digital display

DOORS

- Self-closing slide doors with energy efficient dual pane glass
- Standard lock for each door
- Magnetic gaskets
- Hold-open feature for ease of loading

REFRIGERATION


- Self-contained bottom mounted, air cooled refrigeration system with coated evaporator coil
- Automatic defrost
- Condensate is collected and automatically evaporated from an energy efficient vaporizer
- Refrigerant flow is controlled by a capillary tube
- R290 refrigerant
- Temperature range: +34°F to +40°F (1°C to 4°C)

WARRANTY


- Standard limited three year parts and labor
- Additional two year coverage on compressor part

TECHNICAL SPECIFICATIONS


Model	MBRGM48SB
Crated Weight (lbs) (kg)	531 (241)
Crated Height (in) (mm)	84.6 (2149)
Crated Width (in) (mm)	55.5 (1410)
Crated Depth (in) (mm)	31.9 (810)
Interior Height (in) (mm)	52.0 (1321)
Interior Width (in) (mm)	49.4 (1255)
Interior Depth (in) (mm)	27.6 (701)
Overall Height (in) (mm)	80.75 (2051)
Overall Width (in) (mm)	54 (1372)
Overall Depth (in) (mm)	31 (787)
Gross Cubage (CuFt) (L)	49.0 (1388)
Number of Shelves	8
Shelf Area (SqFt) (Sqm)	40.5 (3.8)
Number of Casters	4
Condensing Unit Size	1/2 HP
Refrigerant	R290
Electrical Characteristics	115/60/1
NEMA Plug Configuration	5-15P
Total Amp Draw	4.5




PLAN VIEW

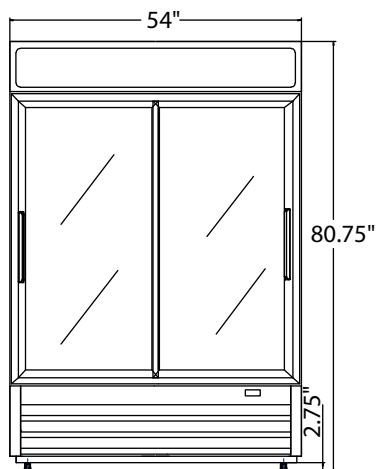

ELEVATION VIEW

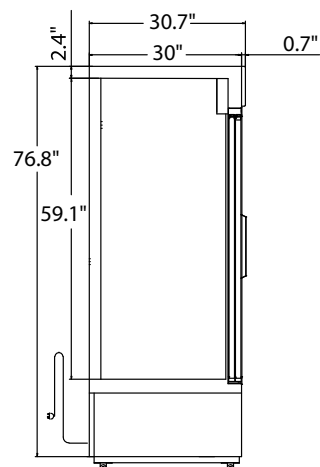


SIDE VIEW



GRAPHIC PANEL DIMENSIONS

LISTINGS**HOOKUP**

Via plug in, 9.8 foot long flexible three wire 14/3 cord with molded plug.



NEMA 5-15P

BID SPECIFICATIONS

Item no. MBRGM48SB

Provide _____ () bottom mounted slide glass door merchandiser refrigerator(s) with lighted sign Master-Bilt® model MBRGM48SB.

Merchandiser to be constructed of black vinyl coated exterior with white interior and stainless steel floor. Other standard features will include a top LED

backlit panel, two LED light strips and factory-installed casters.

Merchandiser will also feature four heavy-duty shelves, adjustable in 1/2" increments, per door and capable of supporting 125 lbs. each.

Locking sliding doors will be self-closing with dual pane glass and magnetic gaskets.

Refrigeration system will use R290 refrigerant in all models. The temperature range will be 34° to 40°F.

Merchandiser to have standard limited three year parts and labor with additional two year coverage on compressor part.

Merchandiser to be ETL listed in the U.S. and Canada & ETL Sanitation listed.

**NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.
All specifications within this publication subject to change without notice.**