



RCT SERIES

Refrigerated Countertop Merchandisers

MODELS

- RCT-36
- RCT-48

RCT-48
(shown with optional stainless steel ends.
Counter not provided as standard.)

FEATURES

CONSTRUCTION

- Painted steel base
- Sets directly on counter (not supplied) with condensing unit mounted on rear
- Two tiers of adjustable black wire shelves
- Mirrored stainless steel interior end panels
- Removable black display deck
- Black trim
- Tempered thermopane front glass
- Top fluorescent light and shelf lights with T-8 bulbs
- Removable shelf lights, shelf supports and shelves
- Thermometer
- Light switch

DOORS

- Removable sliding rear doors with double pane glass

REFRIGERATION

- Self-contained, rear mounted, hermetic condensing unit
- Refrigerant: R-134a
- Adjustable temperature control
- Condensate evaporator
- Off cycle defrost
- Temperature range: 38° to 40°F (3° to 4°C)

WARRANTY

- Standard limited one year parts and labor
- Additional four year coverage on compressor part



Rear-mounted refrigeration system allows maximum interior sales space.

OPTIONS

- Factory installed stainless steel ends (black standard)
- Factory installed self-serve self-closing sliding front doors




RCT SERIES REFRIGERATED COUNTERTOP MERCHANDISERS

TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF SHELVES	STANDARD SHELF SIZE (in inches)	DISPLAY AREA CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D*	H*	L	D*	H*								
RCT-36	36	34 ¹ / ₈	36 ⁹ / ₁₆	914	867	929	115	8.3	1/3	2	17 ¹ / ₄ x 32 ³ / ₁₆	9.25	59.5	390/177
RCT-48	48	34 ¹ / ₈	36 ⁹ / ₁₆	1219	867	929	115	8.3	1/3	2	17 ¹ / ₄ x 44 ³ / ₁₆	12.5	71.5	450/205

*Depth and height includes condensing unit compartment.

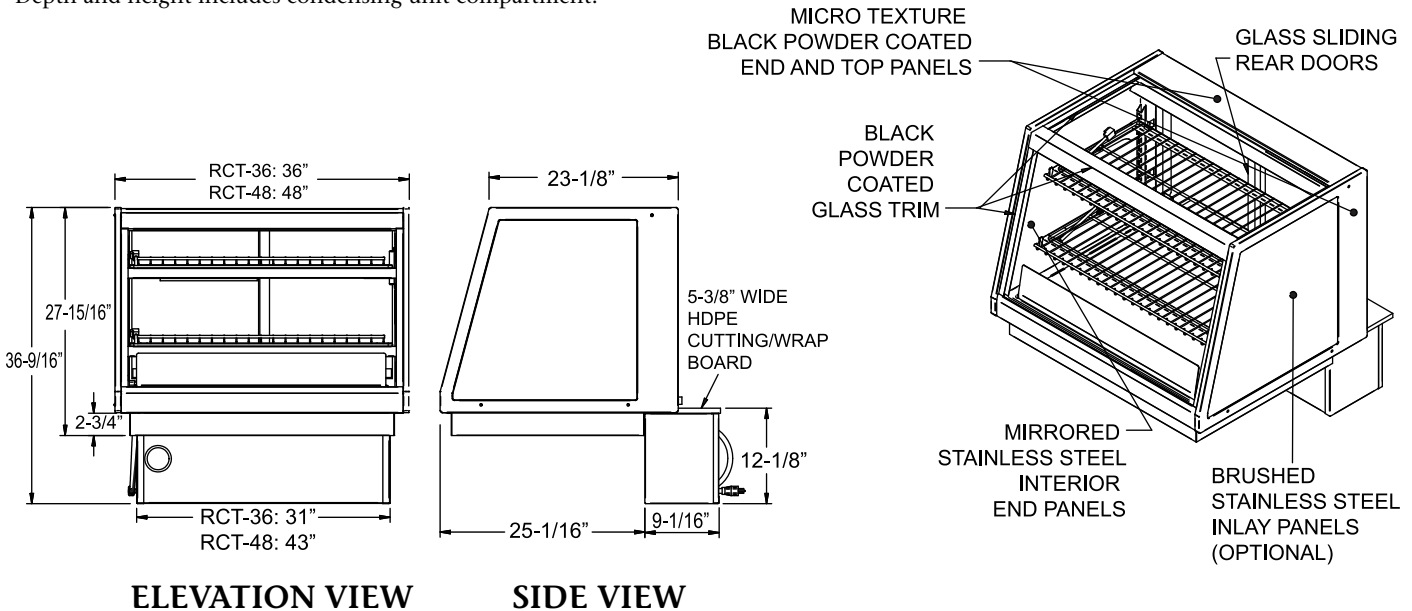

LISTINGS



ANSI/NSF 7

HOOKUP

Via plug in, 8 foot long flexible three wire 12/3 cord with molded plug.



BID SPECIFICATIONS

Item no. RCT _____
Provide _____ () Refrigerated Countertop Merchandiser(s), Master-Bilt® model no. RCT-_____.

Merchandiser will be constructed of a painted steel base and black micro texture powder coated end and top panels. Front glass will be tempered thermopane with black trim. Interior mirrored end panels will be constructed of stainless steel.

Merchandiser will also be equipped with

two tiers of adjustable black wire shelves and removable black display deck.

Lighting will be provided by fluorescent top and shelf lights containing T8 bulbs. Shelf lights, supports and shelves will be removable.

Sliding rear doors will be removable and will feature double pane glass.

Other standard features include a thermometer and independent light switch.

The refrigeration system will be rear-

mounted, self-contained and will feature a hermetic condensing unit. The refrigerant will be R-134a. The temperature range will be 38° to 40°F (3° to 4°C).

Merchandiser to have standard limited one year parts and labor with additional four year coverage on compressor part.

Merchandiser to be UL and C-UL listed and UL-EPH classified.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

