

## MBMC SERIES

### Dual Access Milk Coolers

#### MODELS

- ☐ MBMC08D\*
- ☐ MBMC12D\*
- ☐ MBMC16D\*

\*Add suffix "W" for white finish, "S" for stainless steel



MBMC12DW

MBMC12DS



#### FEATURES

##### CONSTRUCTION

- White enamel painted smooth steel exterior with stainless steel interior
- Dual access to allow serving of two feeding lines
- Corner bumpers
- Four 4" factory-installed easy-roll swivel casters (two locking)
- Epoxy-coated heavy-duty floor racks
- NSF-listed digital thermometer
- Foamed-in-place eco-friendly polyurethane insulation
- Doors and cabinet top foamed-in-place with polyurethane insulation
- Standard floor drain

##### DOORS

- Self-service doors with stainless steel exterior and interior
- Fold-back, insulated doors equipped with locks, gaskets and stainless steel hinges
- Designed to be easily opened by children for self-service
- Hold-open feature secures door during serving

##### REFRIGERATION

- Self-contained bottom mounted system, air-cooled condensing unit
- Powerful, large-capacity system allows cooler to quickly pull product down to storage temperature and maintain it
- Cold wall evaporator with no moving parts which allows more storage space
- Refrigerant: R290
- Operating temperature: 34° to 40°F (1° to 4°C)

##### WARRANTY

- Standard limited three year parts and labor
- Additional two year coverage on compressor part

#### OPTIONS

- ☐ Add suffix "S" for all stainless steel exterior


**TECHNICAL SPECIFICATIONS**

Model*	MBMC08D*	MBMC12D*	MBMC16D*
Crated Weight (lbs.) (kg)	165 (75)	212 (96)	243 (110)
Crated Height (in) (mm)	48.6 (1234)	48.6 (1234)	48.6 (1234)
Crated Width (in) (mm)	35.8 (909)	50.8 (1290)	59.8 (1519)
Crated Depth (in) (mm)	32.3 (820)	32.3 (820)	32.3 (820)
Interior Height (in) (mm)	25.2 (640)	25.2 (640)	25.2 (640)
Interior Width (in) (mm)	30.9 (785)	45.9 (1166)	54.9 (1394)
Interior Depth (in) (mm)	26.5 (673)	26.5 (673)	26.5 (673)
Overall Height (in) (mm)	42 (1067)	42 (1067)	42 (1067)
Overall Width (in) (mm)	34 (865)	49 (1245)	58 (1475)
Overall Depth (in) (mm)	30.6 (777)	30.6 (777)	30.6 (777)
Gross Cubage (CuFt) (L)	13.2 (374)	19.6 (555)	23.5 (665)
Number of Floor Racks	2	2	2
Number of Casters	4	4	4
Condensing Unit Size	1/4 HP	1/4 HP	1/4 HP
Refrigerant	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Nema Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	3.0	3.0	3.0


MODEL	CASES WITH CARTONS			
	13" x 13" x 11"H		19" x 13" x 11"H	
	CASES	CARTONS	CASES	CARTONS
MBMC08D*	8	352	4	288
MBMC12D*	12	528	8	576
MBMC16D*	16	704	10	720

MODEL	LOOSE CARTON (WITHOUT CASES)			
	FLAT TOP		PEAKED TOP (GABLE)	
	1/2 PINT	1 PINT	1/2 PINT	1 PINT
MBMC08D*	864	432	680	430
MBMC12D*	1368	684	1020	645
MBMC16D*	1800	900	1360	860


\* Add suffix "W" for white exterior, "S" for stainless steel.




**MBMC08D\* PLAN VIEW**




**MBMC08D\* ELEVATION VIEW**

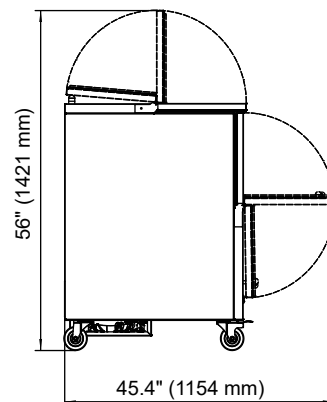


**SIDE VIEW  
ALL MODELS**

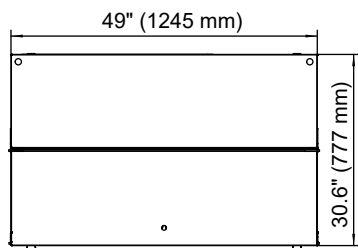


**MBMC12D\* PLAN VIEW**

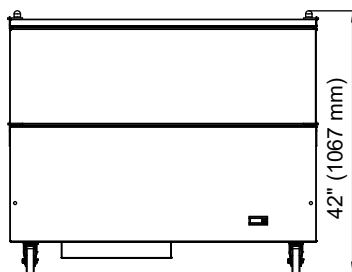

**MBMC12D\* ELEVATION VIEW**

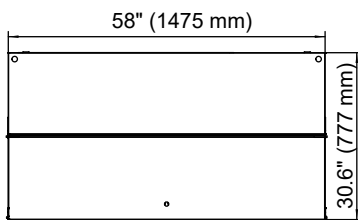

**MBMC16D\* PLAN VIEW**

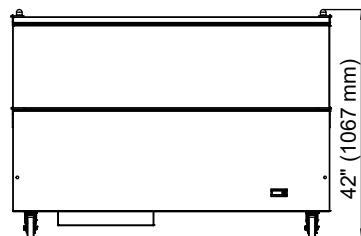

**MBMC16D\* ELEVATION VIEW**

**LISTINGS****HOOKUP**

Via plug in, 9.8 foot long flexible three wire 14/3 cord with molded plug.

**BID SPECIFICATIONS**

Item no. MBMC \_\_\_\_\_  
Provide \_\_\_\_\_ ( ) Dual  
Access Milk Cooler(s), Master-Bilt®  
model no. MBMC \_\_\_\_\_.

Milk cooler will be a dual access type and will be constructed of white painted steel exterior with stainless steel interior. Doors to be stainless steel on the exterior and interior. Doors will also be locking and fold-

back type. In addition, door will be equipped with gaskets, stainless steel hinges and a hold-open feature to secure during serving.

Cooler to be provided with four swivel casters (two locking) and an NSF-listed digital thermometer. Cabinet insulation will consist of foamed-in-place polyurethane.

The self-contained refrigeration

system will feature a cold wall evaporator and R290 refrigerant. The operating temperature will 34° to 40°F (1° to 4°C).

Cooler to have standard limited three year parts and labor with an additional two year coverage on compressor part.

Cooler to be ETL listed in the U.S. and Canada and ETL Sanitation listed.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.  
All specifications within this publication subject to change without notice.