

ITEM NO. _____
 PROJECT _____
 LOCATION _____
 DATE _____ QTY. _____

FUSION™ MBBB-N SERIES

Shallow Solid Door Back Bar Refrigerators

MODELS

- MBBB48N
- MBBB60N
- MBBB72N



MBBB60N



Approved to NSF standard for packaged food products.

FEATURES

CONSTRUCTION

- Stainless steel top
- Black exterior finish on front, sides and back
- Galvanized steel interior with stainless steel floors
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1-1/2"
- Two adjustable shelves per section
- Interior LED lighting
- Adjustable temperature control
- Internal height capacity allows stacking of three longneck beers

DOORS

- Standard door locks on each door
- Magnetic door gaskets, removable without tools
- Door openings have plastic breaker strips to reduce condensation

REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on left side
- Evaporator coils coated to resist corrosion
- Condensate evaporator
- Slide-out condensing unit for easy cleaning and service
- Refrigerant: R290
- Temperature range: 34° to 38°F (1° to 3°C)

WARRANTY

- Standard limited three year parts and labor
- Additional two year coverage on compressor part


OPTIONS

- Shelves with bottle dividers
- 4" plate casters
- Glass doors


TECHNICAL SPECIFICATIONS

| Models | MBBB48N | MBBB60N | MBBB72N |
|----------------------------|---------------|---------------|---------------|
| Crated Weight (lbs) (kg) | 187 (85) | 231 (105) | 271 (123) |
| Crated Height (in) (mm) | 43 (1092) | 43 (1092) | 43 (1092) |
| Crated Width (in) (mm) | 52 (1321) | 64 (1626) | 76 (1930) |
| Crated Depth (in) (mm) | 28 (711) | 28 (711) | 28 (711) |
| Interior Height (in) (mm) | 30-7/8 (784) | 30-7/8 (784) | 30-7/8 (784) |
| Interior Width (in) (mm) | 35-1/4 (895) | 47-1/4 (1200) | 59-1/4 (1505) |
| Interior Depth (in) (mm) | 18-1/4 (464) | 18-1/4 (464) | 18-1/4 (464) |
| Overall Height (in) (mm) | 35-3/8 (899) | 35-3/8 (899) | 35-3/8 (899) |
| Overall Width (in) (mm) | 48-1/8 (1222) | 60-1/8 (1527) | 72-1/8 (1832) |
| Overall Depth (in) (mm)* | 26 (660) | 26 (660) | 26 (660) |
| Gross Cubage (CuFt) (L) | 11.6 (328.5) | 15.6 (442) | 19.6 (555) |
| Number of Shelves | 4 | 4 | 6 |
| Shelf Area (SqFt) (Sqm) | 8.5 (0.8) | 11.18 (1.03) | 14.1 (1.3) |
| Condensing Unit Size | 3/8 HP | 3/8 HP | 3/8 HP |
| Refrigerant | R290 | R290 | R290 |
| Electrical Characteristics | 115/60/1 | 115/60/1 | 115/60/1 |
| Cord and Plug Furnished | Yes | Yes | Yes |
| NEMA Plug Configuration | 5-15P | 5-15P | 5-15P |
| Total Amp Draw | 3.5 | 3.5 | 3.5 |
| 12 oz. Can Capacity | 714 | 966 | 1218 |
| 12 oz. Bottle Capacity | 336 | 468 | 588 |


*Depth includes door handles.




MBBB48N PLAN VIEW

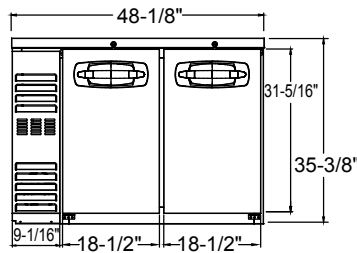


MBBB48N ELEVATION VIEW




ALL MODELS SIDE VIEW

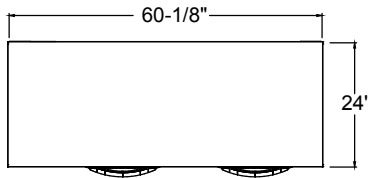


MBBB60N PLAN VIEW

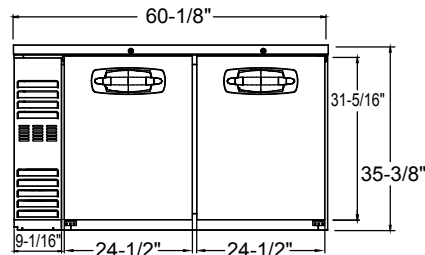

MBBB60N ELEVATION VIEW

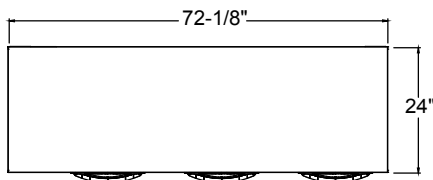

MBBB72N PLAN VIEW

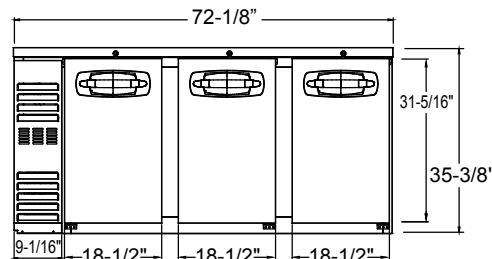

MBBB72N ELEVATION VIEW

LISTINGS



Approved to NSF standard for packaged food products.

HOOKUP

All models via plug in, 9 foot long flexible three wire 14 gauge cord with molded plug.



BID SPECIFICATIONS

Item no. MBBB _____ N.

Provide _____ Shallow Solid Door Back Bar Refrigerator, Master-Bilt® model no. MBBB _____ N.

Back bar refrigerator will feature stainless steel top with black finish on front, door, sides and back. Interior will be galvanized steel with stainless steel floors. Door openings will have plastic breaker strips to

reduce condensation. Adjustable epoxy-coated shelves and interior LED lighting will also be standard.

The refrigeration system will be self-contained and use R290 refrigerant. The temperature range will be 34° to 38°F (1° to 3°C).

System will be equipped with coated evaporator coils and a condensate evaporator. Condensing

unit will be slide-out type for easy cleaning and service.

Refrigerator to have standard limited 3-year parts and labor warranty with additional 2-year coverage on compressor part.

Refrigerator to be UL, C-UL and ETL Sanitation listed as well as approved to NSF standard for packaged food products.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications within this publication subject to change without notice.